

# RTK

## RSat 3 (ROBUST)




### CHARACTERISTIC

- 32GB, user storage space 24GB
- Quick positioning function
- Built-in 5W Radio
- 1408 channels
- Centimeter level
- 4G+WIFI+BT+NFC
- Combined antenna
- LCD display
- Longer endurance
- Linux intelligent system




### SIZE (mm)

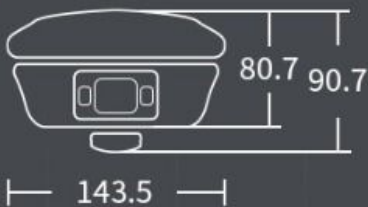

### CONTACT US

 <https://www.asisurveyinginstruments.com/>

 [balinder2kumar@yahoo.com](mailto:balinder2kumar@yahoo.com)  
[balinder2kumar@gmail.com](mailto:balinder2kumar@gmail.com)

# RSat 3 GNSS Receivers



ITEM		SPECIFICATION	REMARKS
HARDWARE SYSTEM		ARM Cortex-A7 1.8GHz	
OS		Linux	
GNSS	GPS	L1C/A, L1C, L2P(Y), L2C, L5	
	GLONASS	L1, L2, L3	
	BDS	B1I, B2I, B3I, B1C, B2a, B2b	
	GALILEO	E1, E5a, E5b, E6	
	QZSS	L1, L2, L5	
	SBAS	L1	
	NavIC (IRNSS)*	L5*	IRNSS support in future
	Channel	1408	
	Data format	NMEA-0183	
	Correction I / O Protocol	RTCM3.X	
	Data update frequency	20Hz(max)	
	Recapture Time	<1s	
	Cold Boot	<40s	
	POSITIONING ACCURACY	Single (RMS)	Horizontal: 1.5m    Vertical: 2.5m
DGPS(RMS)		Horizontal: 0.4m    Vertical : 0.8m	
RTK(RMS)		Horizontal: ±(8mm+1ppm) Vertical: ±(15mm+1ppm)	
Time Accuracy (RMS)		20ns	
Static Accuracy (RMS)		Horizontal: ±(2.5mm+0.5ppm) Vertical: ±(5mm+0.5ppm)	
Speed Accuracy (RMS)		0.03m/s	
Tilt compensation Accuracy(within 60° )		≤2cm	
SYSTEM	Bluetooth	BR+EDR+BLE	
	WIFI	802.11 b/g/n	
	Network	LTE FDD: B1/2/3/4/5/7/8/12/13/18/19/20/25/26/28 LTE TDD: B38/39/40/41 WCDMA: B1/2/4/5/6/8/19 GSM: B2/3/5/8	
	Data Radio	Frequency: 410~470MHz Protocol: TRIMTALK, TRIMMK3, SOUTH, TRANSEOT RF transmit power: 1W/2W/5W Air baud rate: 9600 / 19200bps	
	Storage	32GB Storage	
DISPLAY	LCD	Screen size: 1.3inch Display mode: TFT Display format: 240*RGB*240 View Angle: FULL	
BATTERY	Battery	7.4V, 6500mAh	
	Work time	More than 18 hours (Typical, Rover, GSM)	The static working mode supports continuous data collection for 26 hours under full power



## Office Address

H-10/103, 1st Floor, Express Arcade,  
Near P. P. Trade Center, Netaji Subhash  
Place, Pitampura, New Delhi - 110034, INDIA

<https://asisurveyinginstruments.com>

# RSat 3 GNSS Receivers

**ROBUST**

	Charge	USB PD 15V/2A 5V/3A	Support fast charging adapter and adaptively and dynamically adjust charging current
<b>ENVIRONMENTAL</b>	Work Temperature	-20°C~+60°C	
	Storage Temperature	-40°C~+85°C	
	Shock	Withstand 1.5M pole drop	
	Protection	IP68	
<b>PHYSICAL</b>	Material	Magnesium alloy main body, ABS/PC top cover	
	Dimension	Φ143.5mm*90.7mm	
	Weight	≤0.90kg	
<b>A FULL SET</b>	T20Pro Device	1 SET	
	USB power adapter	1 PCS	
	Type-C to Type-C	1 PCS	
	Radio Antenna	1 PCS	
<b>CERTIFICATION</b>	Regulatory Compliance	CE, FCC <b>CE FC</b>	

▲Manufacturers may update parameters at any time, please refer to the latest product information.



## Office Address

H-10/103, 1st Floor, Express Arcade,  
Near P. P. Trade Center, Netaji Subhash  
Place, Pitampura, New Delhi - 110034, INDIA

<https://asisurveyinginstruments.com>

**ADVANCED SURVEYING INSTRUMENTS (INDIA) PVT. LTD., NEW DELHI, INDIA**

# ROBUST GNSS Receivers

## Get **Fixed** in **PPP** Mode RSat 3

**NO NEED CORS**  
**NO NEED BASE**  
**NO NEED RADIO**  
**NO NEED 4G**



# RSat 3 ROBUST MULTI-FREQUENCY RTK DGPS (GNSS)



## Characteristic

- 1408 channels
- 32GB, user storage space 24GB
- Centimeter level
- 4G+WIFI+Bluetooth
- Adjustable power
- Combined antenna
- LCD display
- 5W Radio, transmission distance maximum 16KM
- Linux intelligent system

## Size<sub>(mm)</sub>



## Contact us

 <https://www.asisurveyinginstruments.com/>

 [balinder2kumar@yahoo.com](mailto:balinder2kumar@yahoo.com), [balinder2kumar@gmail.com](mailto:balinder2kumar@gmail.com)